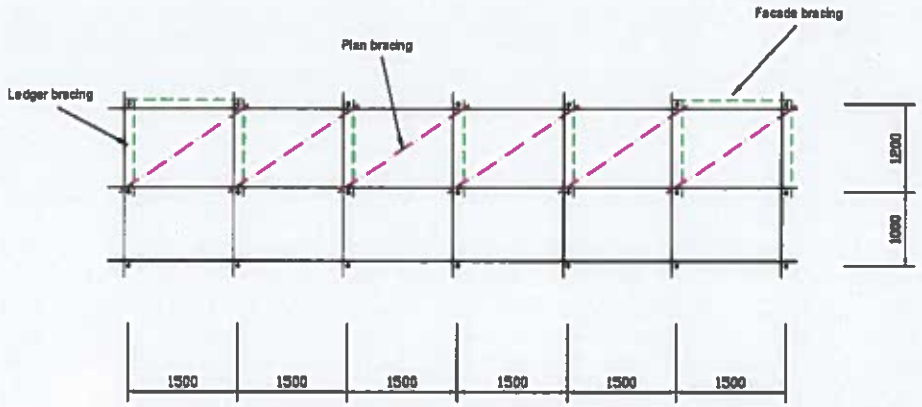

PLAN VIEW

MAX 2no BOARDED LIFTS

MAIN PLATFORM LOAD:
3.0kN/m² (300 kg/m²) @ each bay as indicated on side elevation.

TYPE 4 TUBE MUST BE MANUFACTURED IN ACCORDANCE WITH BS EN 39

SCAFFOLD TO BE ERECTED IN ACCORDANCE WITH TG20:13

USE LOAD BEARING COUPLERS ONLY (EXCEPT FOR BOARD BEARERS)

FOR 38mm BOARDS MAXIMUM SPAN BETWEEN BOARD BEARING TRANSOMS IS 1.2m WITH MAXIMUM OVERHANG OF 150mm AND MINIMUM OVERHANG 50mm

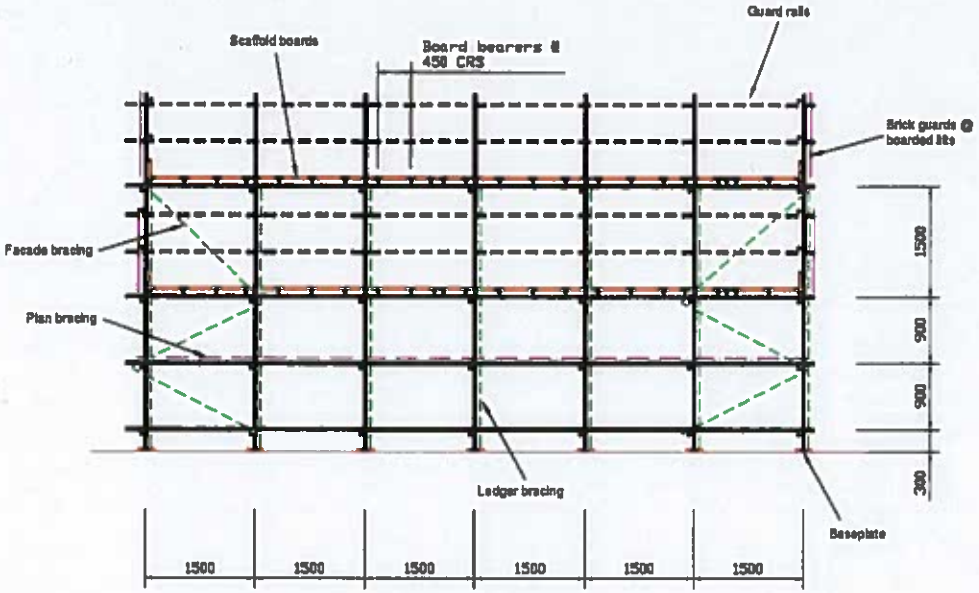

FRONT ELEVATION

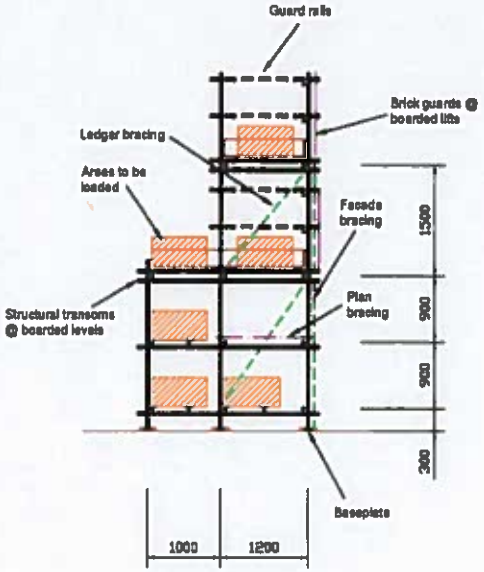

SIDE ELEVATION

The scaffolding supervisor must ensure that a safe working is adopted at all times

SCAFFOLDING ASSOCIATION

NAS

The Design Studio
First Floor
1 Parsons Street
Dudley
West Midlands
DY1 1JP
Tel: 01384 459090
Fax: 01384 347648
Email: info@designsafe.co.uk
Web: www.designsafe.co.uk

Access D
& Safety L

Customer
CENTRAL SCAFFOLD ACCES

Project
BARRATT HOMES NORTH MID

Title
Storage Rack constructed from traditional fittings.
Plan view
Front elevation
Side elevation

Revisions	Description
A	Brick guard rails added
B	WORKING DRAWING

Drawing Status
WORKING DRAWING

Date	Drawn By	Checked By
07/08/2017	D. J.	

Drawing Scale	Drawing no
1-50 @ A2	17179-01-01